

COMPACT VALVE ACTUATOR

2 Nm | 2/3 POINT CONTROL



The appearance of the product may differ from the illustration. Technical specifications are subject to change.

NCBA...02 SERIES

NCBA series is a compact, low torque valve actuator designed and produced to use in stationary heating, ventilation and air-conditioning systems.

Its compact design makes it ideal for tight spaces, ensuring reliable performance.

Our wide range of standard valve actuators has been developed to operate and position ball valves of different sizes.

- Torque 2 Nm
- Valve size DN15(1/2") / DN20(3/4")
- Power supply AC/DC 24V or AC 100...240V
- Shaft dimensions - □ 9.0 mm (fixed)
- Running time < 50 s
- Adjustable angle of rotation
- Selectable direction of rotation by CW/CCW button
- Manual over-ride push button
- Customised versions on request.

MODEL SELECTION TABLE


Torque	Running time	Power supply	Auxiliary switch	Model/Type
2 Nm	< 50 s	AC/DC 24 V ± 10%	—	NCBA 1-02 LN
2 Nm	< 50 s	AC/DC 24 V ± 10%	—	NCBA 1-02 HN
2 Nm	< 50 s	AC 100...230 V	—	NCBA 2-02 LN
2 Nm	< 50 s	AC 230 V	—	NCBA 2-02 HN

COMPACT VALVE ACTUATOR

2 Nm | 2/3 POINT CONTROL

ACTURATOR DIMESNIIONS [mm]

		DN15	DN20
H	LN	72	77
	HN	108	113
L		60	67
S		25	32
M		30	32

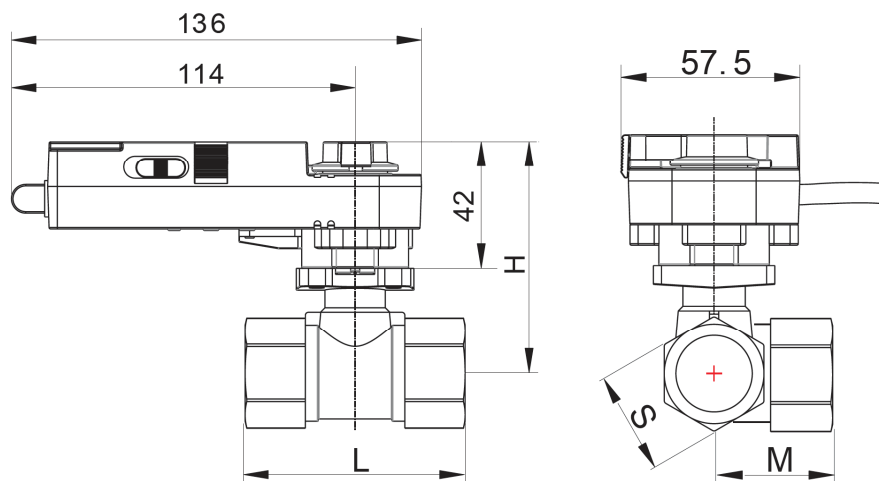

TECHNICAL SPECIFICATION


	NCBA 1-02	NCBA 2-02
Torque	2 Nm	2 Nm
Valve size	DN15(½") / DN20(¾")	DN15(½") / DN20(¾")
Shaft dimensions	□ 9.0 mm (fixed)	
Power supply	AC/DC 24 V ± 10%	AC 100...230 V
Frequency	50...60 Hz	50...60 Hz
Control signal (input)	2/3-point control	2/3-point control
Power consumption		
– Operating	4.0 W	4.0 W
– At end position	1.0 W	1.0 W
Rated power	6.0 VA	6.0 VA
Electrical wiring	1 m Cable	1 m Cable
Protection class	III ⚡	II □
Angle of rotation	90° (95° mechanical limitation)	90° (95° mechanical limitation)
Weight	0.3 kg	0.3 kg
Durability	60,000 rotations	60,000 rotations
Sound level	40 dB	40 dB
Protection degree	IP54	IP54
Working temperature range	-20°C...50°C as per IEC 721-3-3	-20°C...50°C as per IEC 721-3-3
Storage temperature	-30°C...+60°C / IEC 721-3-2	-30°C...+60°C / IEC 721-3-2
Humidity	5...90% rH (non condensing) / EN	5...90% rH (non condensing) / EN
Maintenance	Maintenance free	Maintenance free
Principle of operation	Type 1 (acc. to EN 60730-1)	Type 1 (acc. to EN 60730-1)
Electromagnetic compatibility	CE & ISO 9000 to EN / EEC	CE & ISO 9000 to EN / EEC

*Note that shaft dimension has a tolerance offset of ± 0.2mm.

COMPACT VALVE ACTUATOR


2 Nm | 2/3 POINT CONTROL

Wiring diagram NCBA...02
Power supply AC/DC 24 V / AC 100...230 V

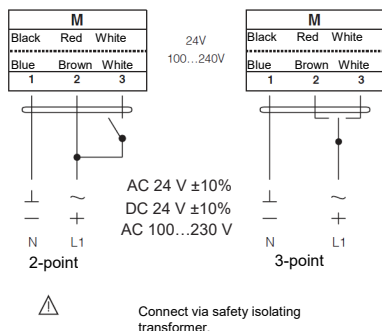


Changing direction of rotation NCBA ...02

Default factory setting: CW. Direction of rotation can be change by toggling between CW/ CCW switch on the actuator's housing.

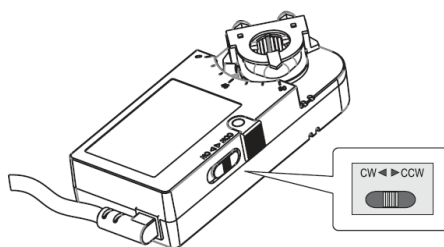


Wiring Diagram NCBA...02
Parallel connection

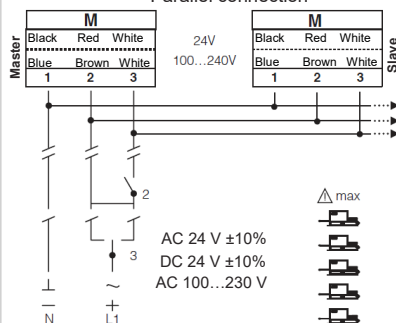

Note

Parallel connection of maximum five NCBA...02 is possible.
Power consumption must be observed!


Installation instruction

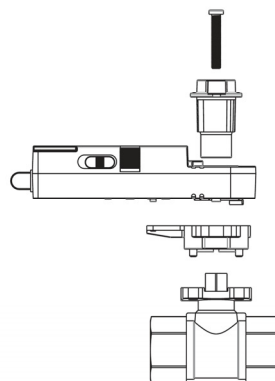

COMPACT VALVE ACTUATOR

2 Nm | 2/3 POINT CONTROL

■ Installation instruction

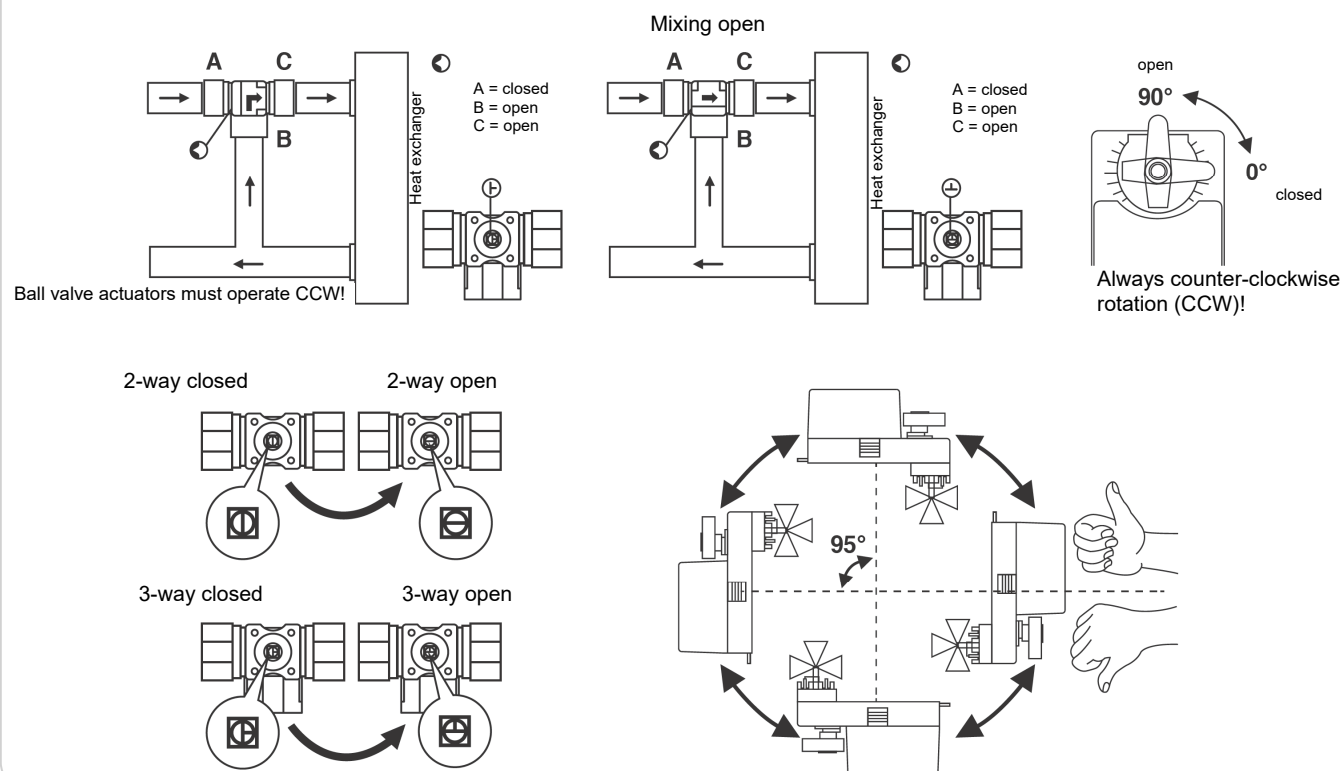

⚠ IMPORTANT REMARKS

This actuator includes electrical and electronic components and may not be disposed as household waste. Please consider the local valid legislation.

AC/DC 24 V: Connect via safety isolating transformer.

AC 230 V: To isolate from the main power supply, the system must incorporate a device which disconnects the phase conductor (with at least a 3 mm contact gap.)

Consult NENUTEC representatives for specific requirements and material selections for your intended application. The entire content of this technical datasheet is protected by copyright. All rights are reserved ©.

The performance specifications are nominal and conform to acceptable industry standards. Nenutec shall not be liable for damages resulting from misapplication or misuse of its products.



IMPORTANT REMARK

The NENUTEC NCBA... actuator series can be equipped with a variety of NENUTEC products.

Contact NENUTEC representatives or factory for the specific requirements and material selection for your intended application.

CUSTOMISED VERSION

NENUTEC offers you actuators in customised versions, e.g. with your own brand name, with colour-coordinated applications and with your particular demand on request.

For further information please contact us or our local representative.

Nenutec Polska

00-236 Warszawa
ul. Świętojerska 5/7
tel.: +48-(0)-504-050225
nenutec@nenutec.pl